



The German Antarctic Receiving Station – upgrades of the VLBI-capabilities for future challenges

The German Antarctic Receiving Station (GARS) O'Higgins started in the early 1990th with regular VLBI operations. Because of its remote position on the Antarctic Peninsula, the VLBI observation was mostly restricted to the Antarctic summer months. New equipment, a continuous operation by the German Aerospace Center (DLR), and new realizations of observation schedules may open the door for regular observations over the whole year. The poster shows the upgrades carried out in hard- and software and discusses ideas to realize more regular observations in a planned test phase.

The site at a glance

The German Antarctic Receiving Station (GARS) is jointly operated by the German Aerospace Center (DLR) and the Federal Agency for Cartography and Geodesy (BKG, Geodetic Observatory Wettzell). The Institute for Antarctic Research Chile (INACH) coordinates the activities and logistics. The 9 m radio telescope at O'Higgins is mainly used for downloading of remote sensing data from radar satellites and for the commanding and monitoring of spacecraft telemetry. During dedicated campaigns it is also used for geodetic VLBI in the Antarctic summer.

Over the last few years, special flights using "C-130 Hercules"-aircrafts and small "DHC-6 Twin Otter"-aircrafts as well as transportation by ship were organized by INACH in order to transport staff, technical material and food for the entire stay from Punta Arenas via Base Frei on King George Island to O'Higgins. The conditions for transport and landing are strongly weather dependent and involve an increasing, challenging task.

The site is also populated with other geodetic instruments:

- different time receivers in combination with a H-maser and Cs-standard
- several GNSS receivers
- a meteorological station
- a radar tide gauge and an underwater sea level gauge



9 m radiotelescope O'Higgins

Upgrades in the years 2013 to 2015

New receiver frontend

The VLBI receiver was renewed because of failures of the cryogenic system. This new receiver for both receiving frequency ranges in S- and X-band for a standard dual band and right hand circular polarization was designed and built in the labs of the Observatory Yebe, Spain. New high performance cryogenic low noise amplifiers are used for first stage amplification of the incoming noise signal from the quasars. This improves the SEFD of the entire receiving chain. The down-converters were also renewed to simplify the maintenance.

The monitoring of the VLBI receiver is Ethernet-based. This gives more flexibility for remote control and supervision from Wettzell.



New S-/X-Band VLBI Receiver at O'Higgins

New data acquisition backend

To complete the receiving chain with new, stable equipment a new data acquisition rack was populated with state-of-the-art components in parallel to the existing VLBA4 rack.

The focus was on digital sampling components. Therefore a very stable and flexibly configurable ADS3000+ baseband converter is installed in combination with a Mark5B+ data recording system. A new Field System PC is available with one of the latest NASA Field System versions to control of all these equipment.

A new maser EFOS-50 builds the basis for a stable frequency and timing. The UTC-connection is managed with a new GPS time receiver with NTP.



Newly installed data acquisition systems for VLBI

New control room

To enable a flexible control of satellite missions as well as of VLBI sessions, a new combined control room was build together with the DLR. The tasks can be controlled there at two operator desks.


First integration plans were discussed to integrate VLBI schedules into the scheduling system RPS and the control software SMCS of the DLR to enable a flexible scheduling of observations of satellite passages and VLBI sessions.

The VLBI sessions can also be controlled from remote at the new control room of the TWIN radio telescopes in Wettzell, using the software e-RemoteCtrl.

This extends the possibilities for VLBI-observations.



New combined satellite tracking and VLBI control room

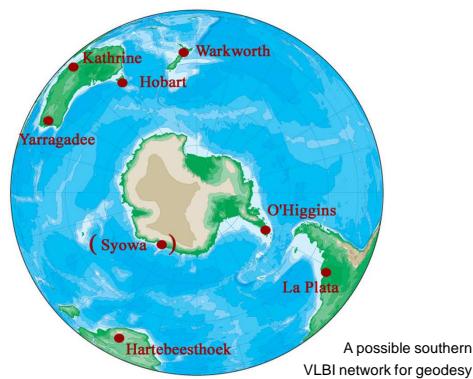

A possible southern VLBI network for geodesy

Integration tests in January and February 2015 and future plans

The integration of the new receiver frontend and the data acquisition backend was done during the VLBI campaign from January to February 2015. The new VLBI receiver was successfully installed into the antennas elevation cabin. The VLBI sampler ADS3000+ and the Mark5B+ were mounted into an existing and available rack in the DLR control room in parallel to the old and still working VLBA4 rack with the Mark5A VLBI data recorder.

The new system was tested in parallel to the existing equipment during four VLBI sessions:

- OHIG94
- OHIG95
- OHIG96
- T2102

The OHIG sessions are dedicated to measure the southern reference frame. The T2 session is used to determine the terrestrial reference frame. Sample data scans were copied and sent to the Bonn correlator already during the running sessions to evaluate the data quality of the new VLBI instrumentation. The first feedback from the correlator showed good data quality and performance.

Goals for the upgrades are the increase of maintenance interval times and a higher automation. The idea behind is to enable one geodetic VLBI session per month in a more frequently used southern VLBI network. The VLBI sessions should be scheduled as intermediate observations within the satellite tracking and control sessions of the DLR. Parts of the VLBI sites may be operated from remote in such a scenario.

Authors

C. Plötz ¹⁾, A. Neidhardt ²⁾, T. Klügel ¹⁾, R. Wojdzia ¹⁾, J. Serna Puente ³⁾, B. Vaquero Jiménez ³⁾, T. Schüler ¹⁾, VLBI-Team Wettzell and colleagues from DLR
¹⁾Federal Agency for Cartography and Geodesy, Frankfurt/Wettzell/Leipzig, Germany - ²⁾Forschungseinrichtung Satellitengeodäsie, Technische Universität München, Germany,
³⁾Instituto Geográfico Nacional, Observatory Yebe, Spain